

### Chlorine dioxide systems from Lutz-Jesco come with decisive benefits

- Compact design
- Convenient, easy operation with the latest control electronics
- Preassembled unit for immediate use
- Integrated self-monitoring of all functions
- Comprehensive accessories from one source

### The right solution for any job

The requirements on chlorine dioxide systems are as varied as the ways in which they are used, which is why Lutz-Jesco has the right EASYZON for numerous types of application. We'll find the right solution for you as well.

#### EASYZON 5

It supplies up to 5g chlorine dioxide/h; this is the right choice for producing and dosing chlorine dioxide for water volumes of up to a maximum 25 m<sup>3</sup>/h. This means, for example, that it is particularly well suited for preventing legionella in sports facilities, residential areas, hospitals and hotels, but also in the industrial sector.


#### EASYZON D and C

These systems can be used to produce 36 – 1440g or 238 – 10000g ClO<sub>2</sub>/h; these are the optimum systems for larger water volumes of maximum 180 – 7200 or 1190 – 50000 m<sup>3</sup>/h. Both system types work according to the acid-chlorite process:

EASYZON D – with conventional, diluted chemicals

EASYZON C – with conventional, concentrated chemicals

### Installation example

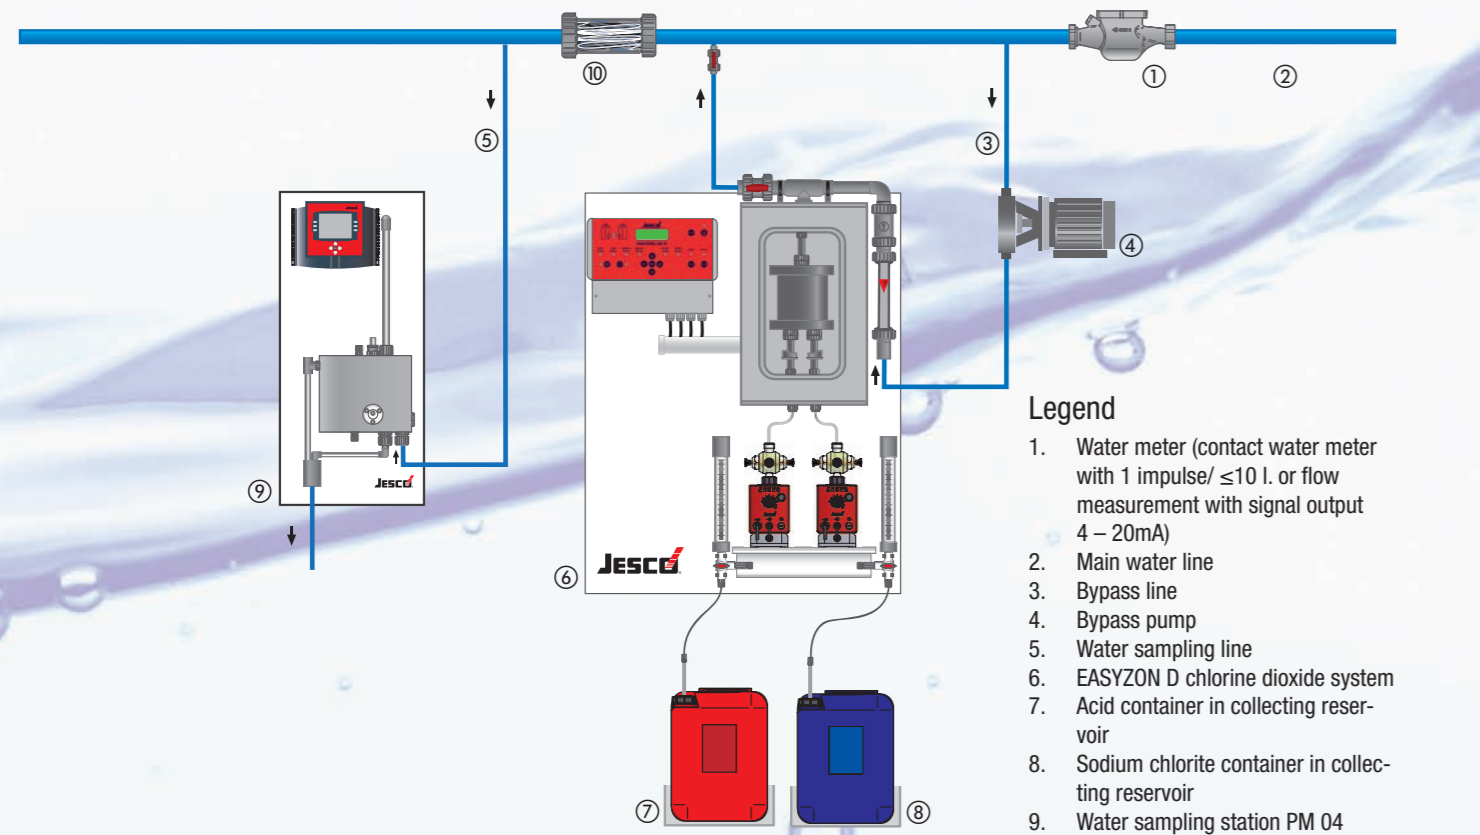

#### Legend

1. Water meter (contact water meter with 1 impulse/ ≤10 l. or flow measurement with signal output 4 – 20mA)
2. Main water line
3. Bypass line
4. Bypass pump
5. Water sampling line
6. EASYZON D chlorine dioxide system
7. Acid container in collecting reservoir
8. Sodium chlorite container in collecting reservoir
9. Water sampling station PM 04



Metering pumps, accessories chlorine gas technology, measuring and control technology, centrifugal pumps, disinfection systems and plant engineering and construction



Lutz-Jesco GmbH  
Am Bostelberge 19 • D-30900 Wedemark  
www.lutz-jesco.de



Products for swimming pool water disinfection based on brine-electrolysis, domestic water systems technology



Technopool Schwimmbadtechnologie GmbH  
Wulfener Straße 18 • D-49082 Osnabrück  
www.technopool-gmbh.de



Tap and tank pumps, flow meters, double diaphragm pumps, centrifugal pumps



Lutz-Pumpen GmbH  
Postfach 1462 • D-97864 Wertheim  
www.lutz-pumpen.de

Head Office  
**Lutz-Jesco GmbH**  
Am Bostelberge 19  
30900 Wedemark  
Germany

Tel.: +49 5130 5802-0  
Fax: +49 5130 580268

E-mail: info@lutz-jesco.com  
Internet: www.lutz-jesco.de

Hungary  
**Lutz-Jesco Üzetág**  
Vasvári P. u. 9.  
9024 Győr  
Hungary

Tel.: +36 96 523046  
Fax: +36 96 523047

E-mail: info@lutz-jesco.hu  
Internet: www.lutz-jesco.hu

Austria  
**Lutz-Jesco GmbH**  
Aredstraße 7/2  
2544 Leobersdorf  
Austria

Tel.: +43 2256 62180  
Fax: +43 2256 6218062

E-mail: info@lutz-jesco.at  
Internet: www.lutz-jesco.at

Netherlands  
**Lutz-Jesco Nederland B.V.**  
Nijverheidstraat 14 C  
2984 AH Ridderkerk  
Netherlands

Tel.: +31 180 499460  
Fax: +31 180 497516

E-mail: info@lutz-jesco.nl  
Internet: www.lutz-jesco.nl

Great Britain  
**Lutz-Jesco (GB) Ltd.**  
Gateway Estate  
West Midlands Freeport  
Birmingham B26 30D  
Great Britain

Tel.: +44 121 782 2662  
Fax: +44 121 782 2680

E-mail: info-gb@jesco.de  
Internet: www.lutz-jesco.de

USA  
**Lutz-JESCO America Corp.**  
55 Bernar Park  
Rochester, N.Y. 14624  
USA

Tel.: +1 585 426-0990  
Fax: +1 585 426-4025

E-mail: mail@jescoamerica.com  
Internet: www.jescoamerica.com

East Asia  
**Lutz-Jesco East Asia Sdn Bhd**  
Taman Perindustrian Jaya  
47200 Petaling Jaya  
Malaysia

Tel.: +603 78454812  
Fax: +603 78454813

E-mail: info@lutz-jescoasia.com  
Internet: www.lutz-jescoasia.com

Middle East  
**Lutz-Jesco Middle East FZE**  
P.O. Box 9614  
SAIF-Free Zone Center  
Sharjah  
UAE

Tel.: +971 6 5572205  
Fax: +971 6 5572230

E-mail: info@jescome.com  
Internet: www.jescome.com



## The right dose of disinfection

### EASYZON - Disinfection with chlorine dioxide




Dosing | Liquids  
Conveying | Gases  
Control | Systems

# EASYZON

A quick end for bacteria - long-life technology for you.

## The EASYZON® process for producing chlorine dioxide

Chlorine dioxide is an unstable gas which is not permitted for transport. Consequently it is produced as a watery solution on a need dependent basis in on-site systems developed especially for this purpose. The EASYZON process produces chlorine dioxide relatively economically from hydrochloric acid and sodium chlorite in commercially approved concentrations. The chlorine dioxide solution is added when necessary to the flow of water where its outstanding disinfecting properties come into effect even at low concentrations.



## The right dose of disinfection with EASYZON®

In the search for an effective, proven and recognised process for disinfecting water, it will quickly become apparent that disinfecting with chlorine dioxide meets all the necessary criteria.

It is not only relatively odour-free and tasteless, it also has clear advantages in contrast with other conventional disinfecting agents:

- No chlorinated by-products are produced.
- Chlorine dioxide is much more stable than chlorine and therefore has a higher disinfecting capacity.
- The disinfecting effect is not diminished in water with a pH of 4-10.
- Chlorine dioxide reliably kills legionella in water and the biofilm is sustainably impaired.
- Chlorine dioxide has very good bactericidal, sporicidal, virucidal and algicidal properties.
- The disinfecting effect is, for example, more powerful than with chlorine.

## EASYZON system types for virtually all water treatment applications

- Legionella prevention
- Treatment of drinking water and wastewater
- Food and drinks industry
- Agriculture (fruit, vegetables, livestock, etc.)
- Industrial water

## Product overview of the EASYZON® chlorine dioxide systems

### EASYZON 5 - chlorine dioxide produced from diluted solutions

Type	Max. dosing quantity g ClO <sub>2</sub> /h	Product concentration g ClO <sub>2</sub> /l	Max. water vol. m <sup>3</sup> /h	Max. operating pressure bar	Dimensions (W x H x D) mm
EASYZON 5	5	2	25	10	490x900x286

### EASYZON D - chlorine dioxide produced from diluted solutions

Type	Max. dosing quantity g ClO <sub>2</sub> /h	Product concentration g ClO <sub>2</sub> /l	Max. water vol. m <sup>3</sup> /h	Max. operating pressure bar	Dimensions (W x H x D) mm
EASYZON 35 D	48	20; (< 2 n.V.)*	240	12	750x1000x340
EASYZON 60 D	99	20; (< 2 n.V.)*	480	12	750x1000x340
EASYZON 130 D	130	20; (< 2 n.V.)*	650	12	750x1000x340
EASYZON 300 D	316	20; (< 2 n.V.)*	1580	8	900x1350x420
EASYZON 700 D	800	20; (< 2 n.V.)*	4000	10	900x1350x420
EASYZON 1400 D	1440	20; (< 2 n.V.)*	7200	4	900x1350x420

### EASYZON C - chlorine dioxide produced from concentrated solutions

Type	Max. dosing quantity g ClO <sub>2</sub> /h	Product concentration g ClO <sub>2</sub> /l	Max. water vol. m <sup>3</sup> /h	Max. operating pressure bar	Dimensions (W x H x D) mm
EASYZON 250 C	250	20; (< 2 n.V.)*	1250	10	1000x1500x300
EASYZON 450 C	450	20; (< 2 n.V.)*	2250	10	1000x1500x300
EASYZON 1200 C	1200	20; (< 2 n.V.)*	6000	6	1150x1700x350
EASYZON 2500 C	2500	20; (< 2 n.V.)*	12500	6	1150x2100x370
EASYZON 6000 C	6000	20; (< 2 n.V.)*	30000	3	1250x2300x400
EASYZON 10000 C	10000	20; (< 2 n.V.)*	50000	2	1250x2300x450

\*after dilution

EASYZON D and C are also available as batch systems. Just get in touch and we will be happy to advise you.

## EASYZON® accessories

### Complete solutions - to upgrade your system.

#### Water sampling stations

Our water sampling stations and control units offer you all the advantages of state-of-the-art measuring and control technology to determine chlorine dioxide concentrations.

#### TopView

TopView computer software is used to control networked systems via a PC, which means you can remotely monitor and adjust the control unit. It also generates a central log of the measured values. TopView is tailored entirely to your wishes as the program can be used for different stages of system development.

#### Sensors

Lutz-Jesco sensors are characterised by high quality, a robust build and good price-performance ratio. Intensive research and many years of practical experience mean we have the skills to successfully deal with the measurement tasks you set us. Lutz-Jesco offers numerous sensors.

### Systematically achieving success

Turn your EASYZON into an efficient system. We offer a comprehensive, integrated range of accessories.

If you have any particular wishes that fall outside of our standard range: We'll find the right solution for you.

We offer the following accessories as standard:

- Collecting reservoirs
- Warning notices (in German or English)
- Protective clothing, protective equipment
- Injection ports
- Pressure reducing valves for the water supply
- „AquaStop“ solenoid valve for the incoming water line ½"
- Measuring instruments (comparator system)
- Gas warning central unit with transducer for ClO<sub>2</sub> in indoor air
- Contact water meter (default: 1 impulse/ ≤10l)
- Manual photometer for chlorine dioxide

